

UniPlus - Industrial PLC Workstation

UniOP™ - Universal Operator Panel Family



- 4 Line x 20 Character LCD Display
- Downloadable Fonts and Scalable Text
- Monochrome Graphic Display
- Keyboard Macro Editor
- Recipe Capabilities (CP10G-04 Only)
- UniNET Networking Capabilities
- Multilanguage Project Capability
- Connection to Bus Systems
- Links Directly to PLC Programming Port

The CP10G-04 and CP11G-04 fulfill the need for a powerful yet cost effective operator interface system in areas where space and cost must be small. The display incorporated into these designs is a backlit LCD. Each line can contain up to 20 characters. Each page can contain up to 32 lines, which can be accessed by scrolling with the arrow keys. Brightness control is provided to adjust the display for easy viewing under nearly any condition. The CP11G-04 is a scaled-down version of the CP10G-04, which offers the user a more cost-effective alternative in the same physical package.

Display Variables

PLC internal variables can be shown on any of the many display pages (limited only by memory size). The number of variables that can be viewed at one time is limited only by the display size. UniOP also provides scaling (linear conversion) of the displayed data. The final value can then be shown in several useful formats including date, time, decimal, bit, hexadecimal, floating point, and string. Data entry with valid range verification is also available for each data type.

Data Entry

The integral keypads on the CP10G-04 and CP11G-04 offers 12 function keys and 13 user LEDs to the display panel. Slide-in legends make it easy to customize and document the operation of each key that has an LED.

UniOP also features an internal battery-backed real time clock (CP10G-04 only). Time and date information from the clock are periodically updated in the PLC to enable processing based on time-of-day, day-of-week or any other period.

Security

An eight-level password protection scheme protects critical system features from undesired access.

Alarms

UniOP can monitor and display up to 1024 alarms (256 for CP11G-04). Attributes and unique messages can be defined for each alarm. Operator acknowledgment can also be required. The last 256 alarm events detected by the UniOP are retained in an internal event list which can be displayed or sent to a serial printer for permanent record.

Adaptability

Custom display screens are developed using the UniOP Designer™ for Windows™ programming software. Your completed project file can be downloaded to the display through the serial port and permanently stored in a Flash EPROM.

Keyboard Macro Editor

A feature that allows you to configure your UniOP keys to do a variety of functions locally in the UniOP. For example: turning pages, setting attributes, setting LEDs, writing to the PLC, going to the alarm list, uploading a recipe set and many more.

Recipes (CP10G-04 Only)

This feature allows you to create a recipe with up to 255 parameter sets for each page of the project file. UniOP has a total of 16K reserved for recipe storage. You can upload or download a parameter set from or to the PLC. Once a parameter set has been downloaded to the PLC, the data contained within the parameter set can be modified.

UniNET Network

The UniNET network allows you to design networks of varying configurations; from two panels with one PLC to multiple panels with multiple PLCs. Data can be written to or retrieved from the PLCs in many different locations at one time. The UniNET network creates a bridge between UniOP panels which allows data to be shared by all PLCs in the network, regardless of the type or manufacturer. Note that the CP11G-04 can only act as a client.


Important Features

- NEMA 4/12 compliant enclosure
- CE approved
- UniNET network capabilities
- Keyboard Macro Editor
- Recipe configuration
- One RS-232 / RS-422 / RS-485 / 20mA current loop serial port, speeds up to 38,400 baud for direct PLC connection (CP10G-04 only)
- One RS-232 port for PC/Printer communication (CP10G-04 only)
- One auxiliary port for high speed bus network communications (CP10G-04 and CP11G-04)
- CP10G-04 has a combined PC/PLC port
- Real-time clock with battery backup (CP10G-04 only)
- 12 function keys with slide-in legends
- 128 KB internal memory standard Flash EPROM
- Memory can be upgraded to 512 KB
- Unlimited number of variables per page
- 1024 prioritized alarms (256 for CP11G-04)
- Historical event list (last 256 events) - CP10G-04 only
- Eight-level password protection
- Prints reports, alarm list, and event list to serial printer
- Displays ASCII standard character set
- User definable characters

Specifications

Physical Dimensions	
Cutout Width and Height	See drawing below
Cutout Depth	79 mm (3.11")
Front Panel Thickness (max.)	5 mm (0.20")
Faceplate height	176 mm (6.93")
Faceplate Width	141 mm (5.55")
Weight	1.1 kg (2.4 lb)
Environment	
Operating Temperature	0 to 50 °C (32 to 122 °F)
Humidity	0 to 95% RH (non-condensing)
Power Requirements	300 mA maximum, 24 VDC
Display	
Type	Liquid Crystal
Size	4 lines x 20 characters/line
Keypad	
Technology	Tactile Feedback (tested 5M times)
Warranty	
All products are warranted for one year against defects in material and workmanship.	
Ordering Information	
Description	Part No.
LCD, 4 x 20	CP10G-04
LCD, 4 x 20	CP11G-04

Panel Cutout Dimensions

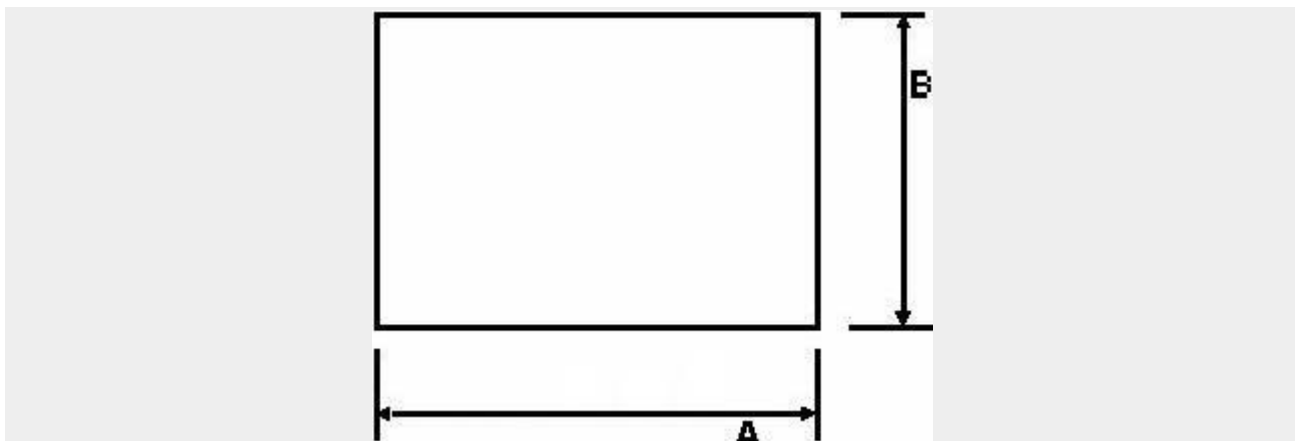

Cutout AxB 128x163 mm or 5.04x6.42"

Specifications subject to change without notice