


effectiView eV121-TNT

The effectiView eV121-TNT is a high performance HMI panel with a 12.1" TFT display and touchscreen interface.

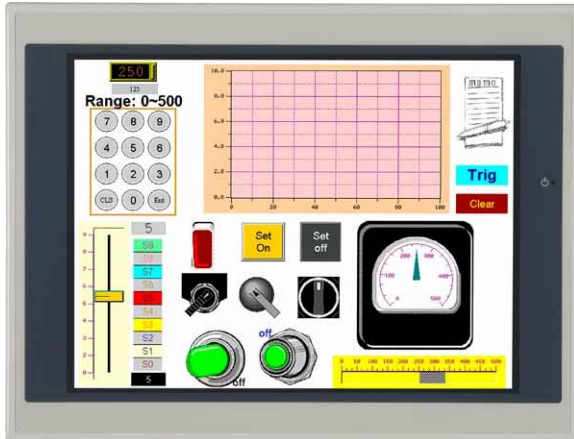

- 12.1" TFT color display, 64K colors, CCFL backlight
- 800X600 screen resolution
- Resistive touchscreen
- Portrait mode operation
- 10/100 Ethernet interface
- 2x USB 2.0 Host interfaces
- 16MB user memory

Highlights

effectiView is a family of HMI operator panels offering an excellent price/performance factor; the level of functionality they offer is state-of-the-art for applications in factory and building automation. The eVDesigner software is the programming tool for all eV products.

The powerful simulation module of the eV Designer simplifies development and shortens the development time.

- Feature-rich and intuitive programming with the eVDesigner software. Powerful project manager workspace with support of multiple applications.
- Ample choice of communication drivers for industrial devices.
- Multiple driver communication capability
- Full vector graphic support with TrueType fonts. Portrait mode operation.
- Display dynamic data in multiple formats: numerical, text, bargraph, slider, gauge and graphic image formats. Multiple image formats supported: bitmap, JPEG and dynamic GIF. Multiple object properties with dynamic control, including visibility and position.
- Pop-up screens and windows.
- Data acquisition and trend presentation. Trend data can be transferred to a host computer using the Ethernet connection.
- Recipe data storage. Recipe data can be transferred to a host computer using the Ethernet connection.
- Multilanguage applications with Unicode support. Up to 10 run-time languages are possible. Application text can be exported/imported for translation.
- Powerful script language with easy-to-use editor. Macro commands can be triggered by touchscreen events and timers.
- Alarms and historical alarm list. Alarm and event information can be printed or transferred to a host computer using the Ethernet connection.
- Multiple level password protection.
- Ethernet-based network to share data between HMIs.

Technical Data

Display

Type	TFT
Resolution	800x600 pixel
Active display area	12.1" diagonal
Colors	64K
Backlight	CCFL
Dimming	Yes

Memory

User memory	16MB Flash
System memory	128KB RAM with battery back-up

Front panel

Touch screen	Analog resistive
System LED indicators	1

Interfaces

Serial	COM1 RS-232, RS-422, RS-485 COM2 RS-232, RS-422, RS-485 COM3 RS-232
Ethernet	10/100
USB	2x Host V2.0

Functionality

Vector graphics	Yes
Multiple drivers	Yes
Multilanguage	10 online languages max.
Data acquisition and trends	Yes
Recipes	Yes
Alarms	Yes
Event list	Yes

Password	Yes
Hardware RTC	Yes, with battery back-up
Screen saver	Yes
Buzzer	Yes, audible feedback for touch screen

Ratings

Power supply voltage	24 VDC
Current consumption	1.2 A
Weight	Approx 2.2 Kg
Battery	Rechargeable, not user replaceable

Environmental Conditions


Operating temperature	0 to 50 °C
Storage temperature	-20 to +60 °C
Operating and storage humidity	10% – 90 % RH non-condensing
Protection class	IP65 front IP20 rear

Dimensions


Faceplate LxH	315x241 mm
Cutout AxB	301.5x228 mm
Mounting depth D	50 mm

Approvals


CE	Emission EN 61000-6-4 Immunity EN 61000-6-2 for installation in industrial environments
----	---

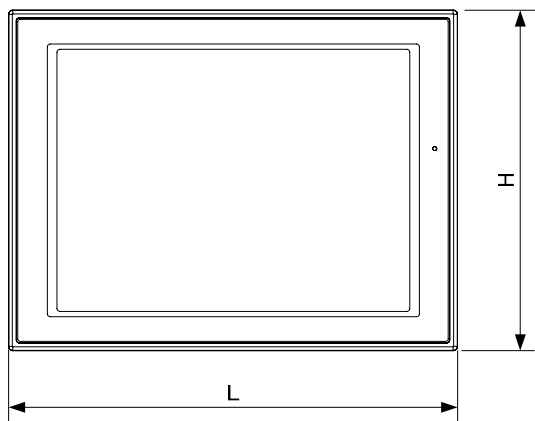


Faceplate



Side view

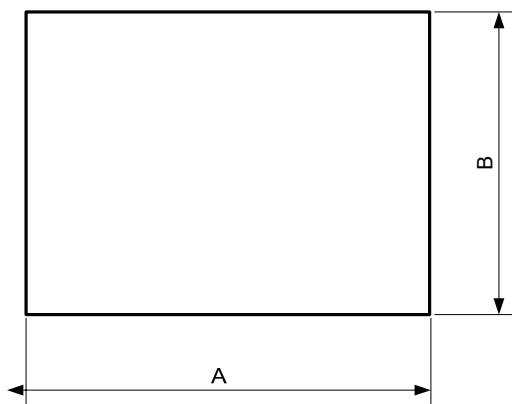

Cut-out

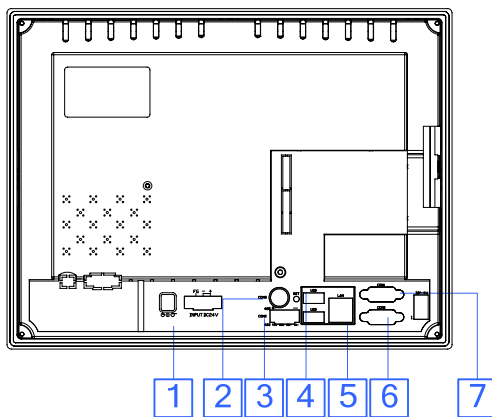

Connections

- 1 Power Supply
- 2 COM3 Serial Port (RS-232)
- 3 COM2 Serial Port (RS-422, RS-485)
- 4 2x USB Ports
- 5 Ethernet Port
- 6 COM2 Serial Port (RS-232, RS-485)
- 7 COM1 Serial Port (RS-232, RS-422, RS-485)

Ordering Information

eV121-VNT

HMI panel, 12.1" TFT display, 800x600, 64K colors, 16MB user memory, Ethernet interface, 2 USB interfaces

Tn288 Ver. 1.0
Exor International Inc.
EMEA/South America: Sitek S.p.A., Italy
North America: Exor Electronic R&D, USA
India: Exor India, India
Asia: Cermate Technologies Inc., Taiwan
Copyright © 2008 Exor International Inc.

Subject to change without notice

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

www.exorint.net