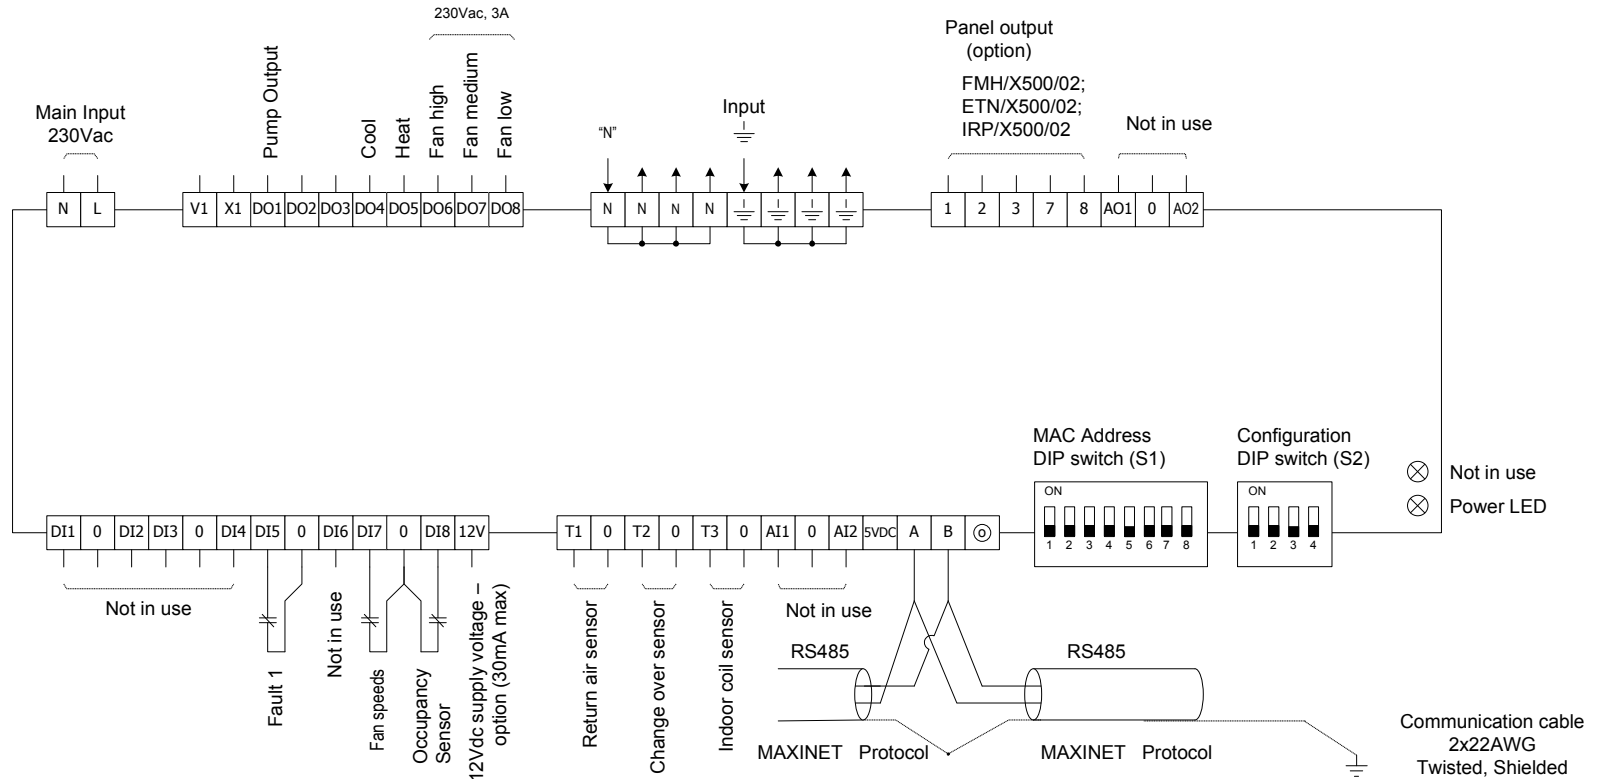


Important !

Disconnect power to the main board before making any changes to DIP switches/ Jumpers, wiring the unit and/or connecting the wall panel.

**Digital Inputs**

- DI5,0 - Fault 1 input (N.C.)**
When open – all outputs OFF (no delay)
- DI7,0 - Fan speeds**
Open – 1 Speeds, Close – 3 Speed
- DI8,0 - Occupancy Sensor**
One of 3 modes (set by communication):
1 Auto: When the DI8 input (N.C) is open for 10 minutes, all outputs turn Off.(Default)
2 Start/Stop
3 Occupied/Non occupied (Economy mode)

DIP switch Configuration (S2)

- S2.1 – Fan ON / Auto fan configuration in cool/heat**
- | | | |
|-----|---|-------------------------|
| ON | - | Auto fan in Cool |
| OFF | - | Fan ON (always) in Cool |
- S2.2 – 2-pipe / 4-pipe system**
- | | | |
|-----|---|--------|
| ON | - | 4-pipe |
| OFF | - | 2-pipe |
- S2.3 –**
- | | | |
|-----|---|-------------------------|
| ON | - | Auto fan in Heat |
| OFF | - | Fan ON (always) in Heat |
- S2.4 – “End of network” configuration**
- | | | |
|-----|---|--------------------|
| ON | - | End of network |
| OFF | - | Not end of network |

**Temperature Sensors Logic**

- T1,0 - Return air sensor**
The ambient (room) temperature can be sensed via the return air sensor.
- T2,0 - Change-over sensor**
Mode is automatically selected, based on the water temperature sensed by T2 (2-pipe system only) T2 > 30°C → Heat , T2 < 20°C → Cool
- T3,0 - Indoor coil sensor**
Soft-start in Heat
When T3 rises above (or equals) 36°C → The indoor fan will start working (according to FAN ON or AUTO FAN state)
When the temperature drops below 32°C → The indoor fan will turn OFF.
- *When T3 is not connected:
- If AUTO FAN is selected, the indoor fan will start working 30 seconds after demand for heat.
- If FAN ON is selected, the indoor fan will work continuously.

meitav-tec

Tel: +972-3-9626462
Fax: +972-3-9626620
e-mail: support@meitavtec.com

Title:

CTU1800-3S-FC-SUPERDate: **24.01.2011**

2 Change DI7,0 description

01.08.11

Print name: PS-2600-ASU

Drawn: M.Ruchansky

Software name: 11406401

Checked: O.Volovitch

Check sum : 092A

Approved: A.Samocho

1 Original (with BT)

24.01.11

File: CTU1800-3S-FC-SUPER.vsd