

eSMART10

The eSMART Series HMI products combine state-of-the-art features and top performance with an outstanding design. They have been designed to offer an outstanding price/performance ratio for challenging applications. They are the ideal choice for HMI applications including factory and building automation.

eSMART10 features a bright 10.1" TFT widescreen (16:9) display with a fully dimmable LED backlight.



- 10.1" TFT color display, LED backlight
- 1024x600 pixel (WVGA) resolution, 64K colors
- Resistive touchscreen
- Ethernet port
- USB port

Highlights

The eSMART HMI products have been designed to run the JMobile software.


- Compatible with JMobileStudio.
- Full vector graphic support. Native support of SVG graphic objects, transparency and alpha blending.
- Screen object dynamics: control visibility and transparency, move, resize, rotate any object on screen. Change properties of basic and complex objects.
- Multilanguage applications with TrueType fonts. Easily create, install and maintain applications in multiple languages to meet global requirements.
- Data display in numerical, text, bargraph, analog gauges and graphic image formats.
- Rich set of state-of-the-art HMI features: data acquisition and logging, trend presentation, alarm handling, scheduler and timed actions (daily and weekly schedulers, exception dates), recipes, security and user management, e-mail and RSS feeds.
- Wide selection of communication drivers available with multiple-driver communication capability.
- Remote monitoring and control with Client-Server functionality.
- Off-line and on-line simulation with JMobile Studio.
- Powerful scripting language for automating HMI applications. Efficient script debugger improves productivity in application development.
- Rich gallery of objects and symbols

Technical Data


Display	
Type	TFT
Resolution	1024x600, WVGA
Active display area	10.1" diagonal
Colors	64K
Backlight	LED
Brightness	200 Cd/m ² typ.
Dimming	Yes
System Resources	
CPU	ARM Cortex A8 1GHz
Operating System	Linux 3.12
RAM	512 MB
Flash	4 GB
Application memory	60 MB
Real Time Clock	Yes
RTC backup	Supercapacitor
Buzzer	Yes
User Interface	
Touchscreen	Analog resistive
Interface	
Ethernet	1x 10/100 Mbit
USB	1x Host (V2.0, max. 500 mA)
Serial	1x RS-232/RS-485/RS-422, software configurable
Ratings	
Power supply voltage	24 Vdc (18 to 32 Vdc)
Current consumption	0.38 A at 24Vdc(max.)
Fuse	Automatic

Weight	Approx 1.0 Kg
Environmental Conditions	
Operating temperature	0 to 50 °C (vertical installation)
Storage temperature	-20 to +70 °C
Operating and storage humidity	5 – 85 % relative humidity, non-condensing
Protection class	Front: IP66, Type 2 and 4X Rear: IP20
Dimensions	
Faceplate LxH	282x197 mm (11.10x7.75")
Cutout AxB	271x186 mm (10.66x7.32")
Depth D+T	29+6 mm (1.14+0.23")
Approvals	
CE	Emission EN 61000-6-4 Immunity EN 61000-6-2 for installation in industrial environments
	Emission EN 61000-6-3 Immunity EN 61000-6-1, for installation in residential environments
UL	cULus

Dimensions

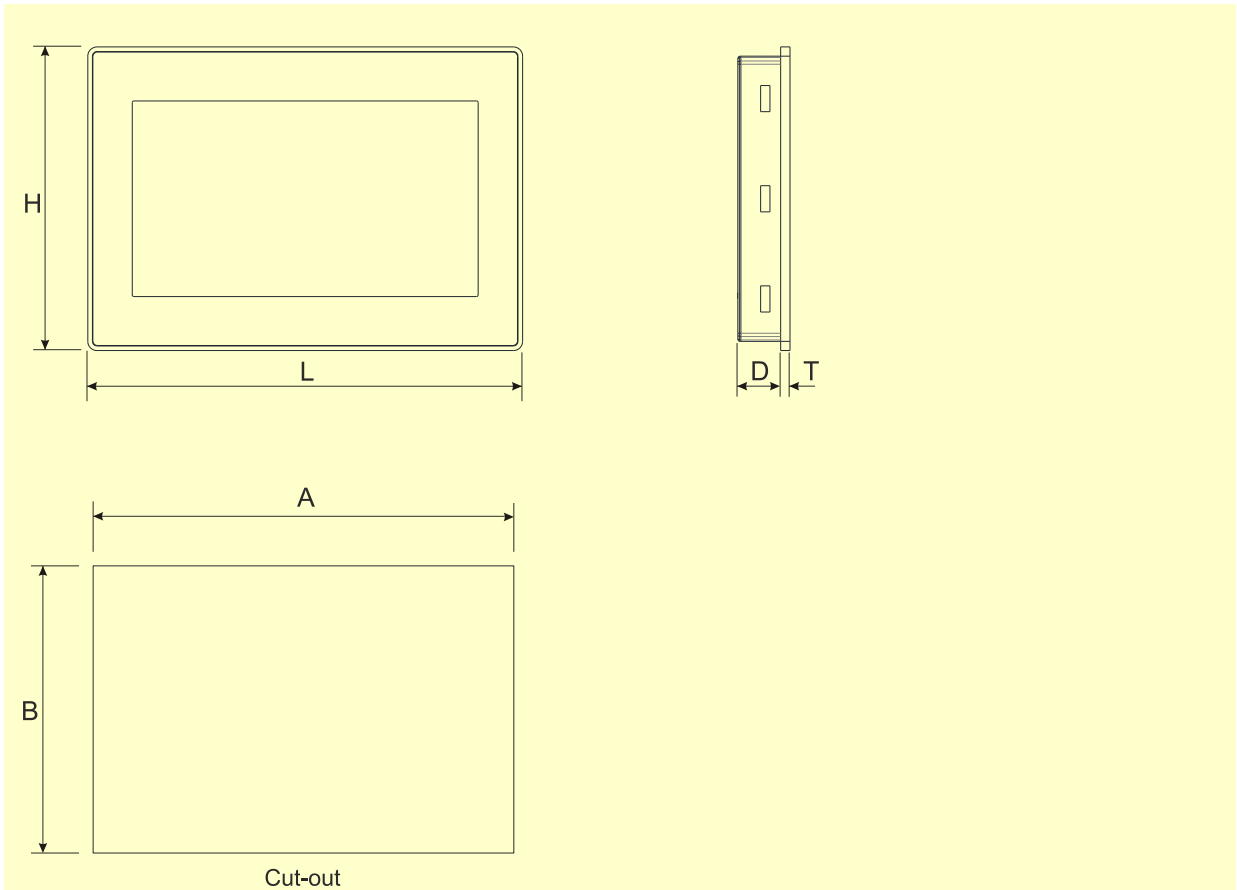

Connections

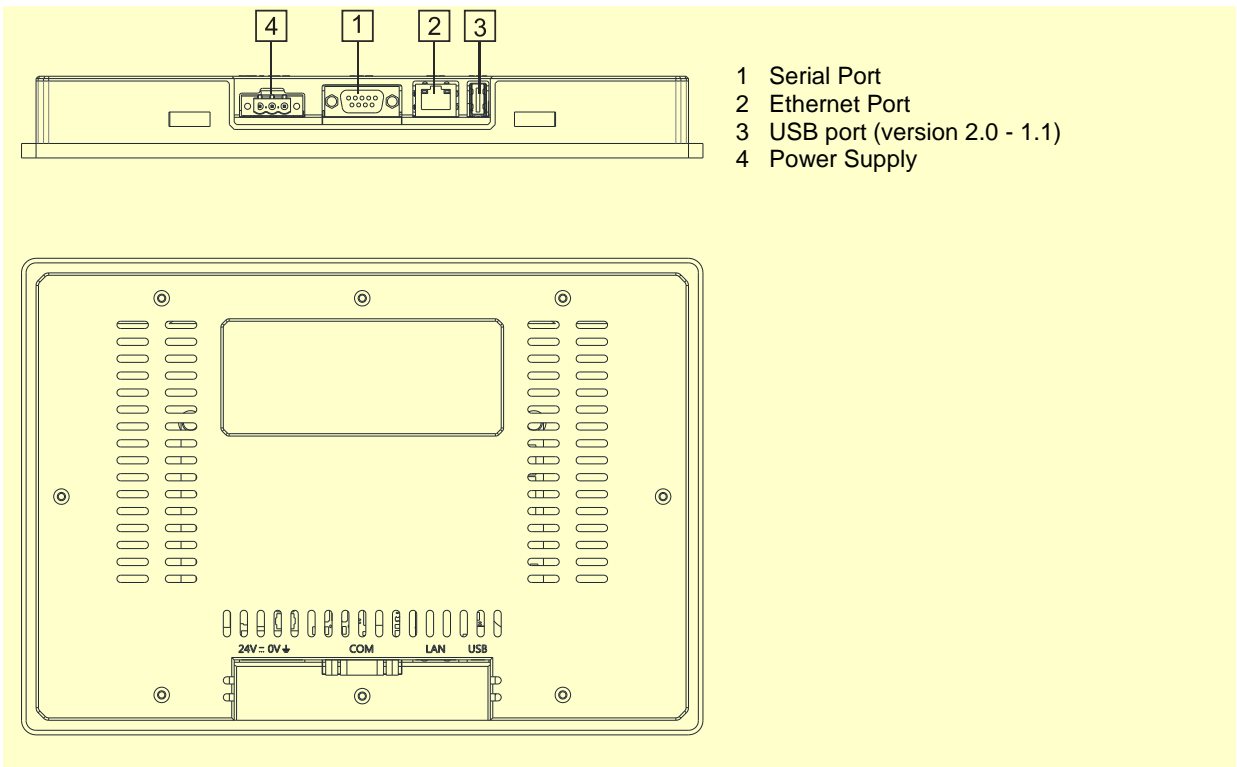

Ordering Information

Model	Part Number	Description
eSMART10	+ESMA10U301	10" widescreen TFT color touchscreen with Ethernet and USB interfaces. JMobile runtime.

Ptn0523

Ver. 1.2

Copyright © 2015 Exor International S.p.A. – Verona, Italy

Subject to change without notice

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

www.exorint.net