

## eX710 Tech-Notes

10.1" TFT color with multitouch projected capacitive touchscreen.

3 Ethernet ports, 1 serial port, 2 USB ports. JMobile runtime.



- 10.1" TFT color display, resolution 1280x800 pixel, 16M colors.  
Dimmable LED backlight
- Projected capacitive touchscreen. True glass design.  
Multitouch operation
- 3 Ethernet ports
- SD Card slot
- 2 Plug-in modules for system expansion

## Overview


eX700 Series HMI products combine state-of-the-art connectivity features and top performance in a great design. Products have been designed as IoT edge devices with the combination of a powerful controller with networking capability and outstanding communication options including client/server OPC UA. They are the ideal choice for all demanding IoT edge applications in factory, marine and building automation.

The glass projected capacitive touchscreen and the brilliant 10.1" widescreen display with resolution of 1280x800 guarantee great optical performance; with the support of multitouch gesture programming they can create the most natural human interfaces.


eX Series 700 HMI products have been designed to run the JMobile software.

- JMobile runtime included
- Requires JMobile V2.6 or higher
- Supports JMcloud secure connectivity with full network separation
- OPC UA Server and Client
- Optional CODESYS V3 runtime with choice of EtherCAT, Profinet, Ethernet IP and Powerlink


Technical Data



|                                      |   |
|--------------------------------------|---|
| <b>System Resources</b>              |   |
| Display - Colors                     | 10.1" TFT 16:9 LED - 16M  |
| Resolution                           | 1280x800, WXGA  |
| Brightness                           | 500 Cd/m <sup>2</sup> typ.  |
| Dimming                              | to 0%   |
| Touchscreen                          | True Glass Projected Capacitive, Multitouch   |
| CPU                                  | ARM Cortex-A9 dual core 800 MHz   |
| Operating System                     | Linux RT  |
| Flash                                | 4 GB  |
| RAM                                  | 1 GB  |
| Real Time Clock, RTC Back-up, Buzzer | Yes   |
| <b>Interface</b>                     |   |
| Ethernet port                        | 3 (port 0 - 10/100/1000, port 1 - 10/100, port 2 - 10/100)  |
| USB port                             | 2 (Host V2.0, max. 500 mA)  |
| Serial port                          | 1 (RS-232, RS-485, RS-422, software configurable)<br>Max 3 serial ports using plug-in modules.                |
| SD card                              | Yes   |
| Expansion                            | 2 slot for plug in modules  |
| <b>Ratings</b>                       |   |
| Power supply                         | 24 Vdc (10 to 32 Vdc)   |
| Current Consumption                  | 1.0 A at 24 Vdc (max.)  |
| Input Protection                     | Electronic  |
| Battery                              | Rechargeable Lithium battery, not user-replaceable  |
| <b>Environment Conditions</b>        |   |
| Operating Temp                       | -20° to +60 °C (vertical installation)<br>Plug-in modules and USB devices may limit max temperature to +50 °C |
| Storage Temp                         | -20°C to +70°C  |
| Operating / Storage Humidity         | 5-85% RH, non condensing  |
| Protection Class                     | IP66 (front), IP20 (rear)   |
| <b>Dimensions and Weights</b>        |   |
| Faceplate LxH                        | 282x197 mm (11.10x7.80")  |
| Cutout AxB                           | 271x186 mm (10.67x7.32")  |
| Depth D+T                            | 56+8 mm (2.20+0.33")  |
| Weight                               | 2.5 Kg  |
| <b>Approvals</b>                     |   |
| CE                                   | Emission EN 61000-6-4, Immunity EN 61000-6-2 for installation in industrial environments                      |
| UL                                   | cULus: UL61010-1 / UL61010-2-201  |
| UL                                   | cULus: Class 1 Div 2  |
| IECex                                | Zone 2/22: Ex nA IIC T5 Gc, Ex tc IIIC T95°C Dc   |
| ATEX                                 | Zone 2/22: II 3 G Ex nA IIC T5 Gc, II 3 D Ex tc IIIC T95°C Dc   |
| DNV-GL                               | Yes   |
| RCM                                  | Yes   |

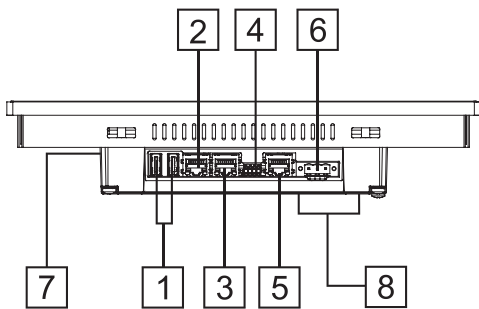

- 1 USB ports 1 and 2
- 2 Ethernet port 2 (10/100 Mb)
- 3 Ethernet port 1 (10/100 Mb)
- 4 Serial port
- 5 Ethernet port 0 (10/100/1000 Mb)
- 6 Power supply
- 7 SD Card slot
- 8 2 Expansion slots for plugin modules

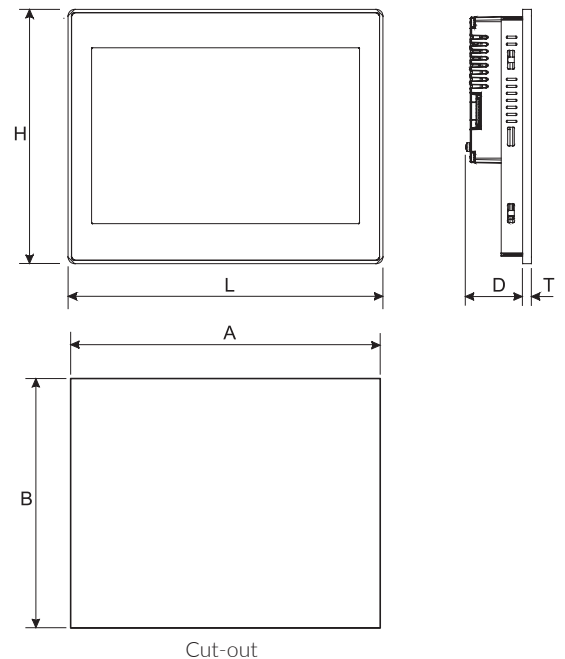

Ordering Information

| Model | Part Number | Description   |
|-------|-------------|---|
| eX710 | +EX710U5P1  | 10.1" widescreen TFT color with multitouch projected capacitive touchscreen. 3 Ethernet ports, 1 serial port, 2 USB ports. JMobile runtime. |